


This '_IsMaintenance' Property is populated with the 'Value' property from any one of the three RadioButton controls visible on the Dialog. The three RadioButtons on this Dialog can be seen in the pull-down list of Dialog Controls below; their respective 'Value' Properties can be seen in the table on the right-hand side:

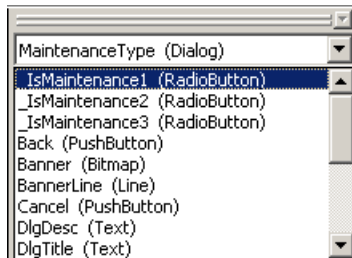

_IsMaintenance1	Modify	Change
_IsMaintenance2	Repair	Reinstall
_IsMaintenance3	Remove	Remove

Using the concepts we discussed earlier in this article we can see how by using the Property Manager shown below we can force one of the RadioButton controls to be the default option by changing the value of '_IsMaintenance' to match one of the values illustrated in the table above (i.e. 'Change', 'Reinstall' or 'Remove').

Note that the default value for this '_IsMaintenance' property is 'Change' – forcing the 'Modify' (middle) RadioButton to be selected when the dialog is first shown:

Project Property Manager		
Name	Value	Comments
_IsMaintenance	Change	
_IsSetupTypeMin	Typical	
AgreeToLicense	No	
ApplicationUsers	AllUsers	
ARPAUTHORIZEDCDFPREFIX		
ARPINSTALLLOCATION		
ARPNOMODIFY	0	
ARPNOREMOVE	0	
ARPNOREPAIR	0	
ARPPRODUCTICON		
ARPSIZE		

This '_IsMaintenance' property is a largely undocumented property of Windows Installer, as such you will not find it referenced in the IPWI help or the Microsoft Windows Installer help library. There are articles available at support.installshield.com with more information on the different functionality for each of the possible values of the '_IsMaintenance' property.

